


Graphite Manor™

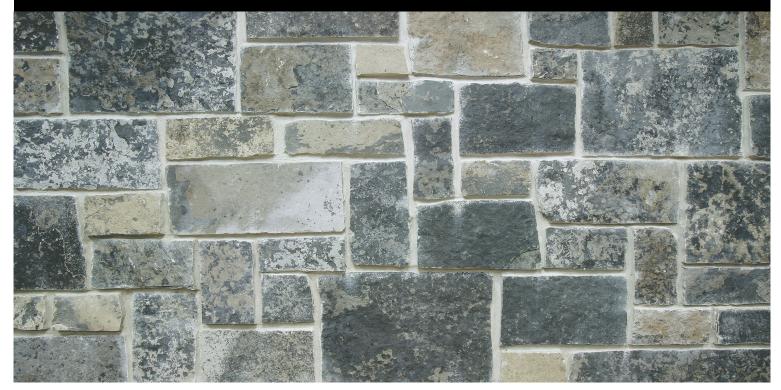

SPECIFICATIONS

	III ICATION	
	GEOLOGY	Limestone
	TYPE	100% Bedface
譜	PATTERN	Natural Course Heights 2:1 Random Ashlar
<u>∓</u>	HEIGHTS	4"-12" random (Full Bed & Thin Veneer)
₩	LENGTHS	8"-20" (Full Bed); 8"-24" (Thin Veneer); Crated/palletized material can exceed 20")
۔	DEPTHS	3/4" - 1 1/4" (Thin Veneer); 3"-5" Full Veneer)
₽)	COLORS	Beige, Black, Buff, Charcoal, Gray-Grey, Tan
<u> </u>	COVERAGE	Full Bed Depth Veneer: 35-40 Square Feet Per Ton
Ê	WEIGHT	14.9 lbs. per square foot (Thin Veneer)
=	FLATS	10 s/f Box; 100 s/f Crate, 180 s/f Crate; 100 s/f Pallet, 180 s/f Crate, 200 s/f Pallet
#	CORNERS	10 l/f Box; 100 l/f Crate; 100 l/f pallet
~	NOTES	"Graphite Manor" was previously known as the legacy NSVI product, "Stockholm". Some photos may still show the former product name.

ASTM C-97

Water Absorption %	.31
Bulk Specific Gravity	2.83

ASTM C-170

Parallel to Rift, Dry (psi)	36100
Parallel to Rift, Wet (psi)	32000
Perpendicular to Rift, Dry (psi)	35800
Perpendicular to Rift, Wet (psi)	30000

ASTM C-99

Parallel to Rift, Dry (psi)	3770
Parallel to Rift, Wet (psi)	3500

ASTM C-880

Perpendicular to Rift, Dry (psi)	1780
Perpendicular to Rift, Wet (psi)	1730





Phone: 920-923-2800 | Toll Free: 877-923-2800 | Fax: 920-923-3800