

# Installation Guide & Helpful Tips

## Getting Started

- **Material Calculations** ..... Pg. 2
- **Environmental Considerations** ..... Pg. 2
- **Tools Used**
- **Preparation**
  - Substrates ..... Pg. 3
  - Project Work Area ..... Pg. 4
  - Weather Resistant Barrier ..... Pg. 4
  - Wire Mesh / Lath ..... Pg. 4
  - Scratch Coat ..... Pg. 4
  - Interiors (Cement Board) ..... Pg. 4
- **Mortar** ..... Pg. 4
  - Types
  - Mixing
  - Bonding Agent

## Installation ..... Pg. 5

- **Trimming & Cutting**
- **Applying Natural THIN Stone Veneer**
- **Filling & Finishing Joints**
- **Care, Cleaning, and Maintenance**

## Application Tips

- **Arches** ..... Pg. 6
- **Columns** ..... Pg. 6
- **Corners** ..... Pg. 6
- **Drystack (Tight-Fit Joints)** ..... Pg. 6
- **Fireplaces** ..... Pg. 6
- **Flashings** ..... Pg. 7
- **Floors, Walks, & Patios** ..... Pg. 7
- **Grade Level** ..... Pg. 7
- **Hearth, Trim, & KeyStones** ..... Pg. 7
- **Interior Walls** ..... Pg. 4
- **Sills & Windows** ..... Pg. 7
- **Stone Patterns** ..... Pg. 7
  - Dimensional
  - Dimensional LedgeStone
  - Random Ashlar
  - LedgeStone
  - Mosaic
  - Travertine

## Codes & Standards ..... Pg. 8

## Warranty Information .....Pg. 8

FDL Natural Stone highly recommends the installer read this document in its entirety before installing Natural THIN Stone Veneers. The information contained is provided to explain the most commonly asked questions about stone installation. The instructions, tips, and hints serve as general guidelines. FDL Natural Stone has neither liability, nor can be held responsible, to any person or entity for any misunderstanding, misuses, or misapplication that would cause loss or damage of any kind. Review and adhere to local building codes, and follow safety guidelines. If questions arise, please attempt to contact your local dealer first. If the dealer cannot answer your question, call FDL Natural Stone Technical Support: 920-251-2434





# Getting Started

FDLNS recommends having at least 5% - 10% additional material on-hand to ensure ideal color, size, and texture distribution. \*

## • Material Calculations for FLATS

$$\text{Area (SqFt)} = \text{Length(ft)} \times \text{Height(ft)}$$

Subtract area covered by windows & doors.

Products in the **Ledgestone and Dimensional Ledgestone Collection** are packaged/marketed for tight-fit or "dry-stacked" applications, that is, **no mortar joint**. All other products are packaged assuming 1/2" mortar joint.

## • Material Calculations for CORNERS

Measure length or height<sub>(ft)</sub> of corner to be covered with stone.

One linear foot of corners will cover approximately 1/2 square foot of flats which can then be subtracted from the total square footage of flats calculated above.

For **Virginia or Silver Ledgestone** corners, measure linear footage and divide by two. Then see "Corners", Pg. 6. (Integrate 1—2 flats for every corner.)

**Hudson & Diamond Ridge** corners: 50% are ninety degree corners, and 50% are flats with one snapped "natural" end, and an irregular end.

**Dimensional Ledgestone** corners: 100% flats with snapped "natural" squared off ends.  
**No Full Returns for: Bronze, Copper, Platinum, Nickel**

Refer to website for corner installation of the following:  
Virginia / Silver / Hudson / Diamond Ridge / Bronze / Copper / Platinum / Nickel Ledgestone.

<https://www.fdlnaturalstone.com/installation-instructions/>

## • Material Calculations for Panelized Products:

Virginia Ledgestone-Panel Silver Ledgestone-Panel Ironwood-Panel London-Panel

<https://www.fdlnaturalstone.com/wp-content/uploads/2023/02/Panel-Project-Calculations-d.pdf>


## • Tools & Equipment to Consider

FDLNS highly recommends using a **King Cutter™** to efficiently cleave stone while leaving a natural edge!

Very low dust Faster than sawing	Highly mobile 100% solid steel	No power source needed Indoors or Outdoors
-------------------------------------	-----------------------------------	---

Please visit: <https://fdlnaturalstone.com/wp-content/uploads/2021/10/KingCutterPromo.pdf> for a demo video & more information.

Call: **877-923-2800** or send an email to: [order@fdlnaturalstone](mailto:order@fdlnaturalstone) to order yours today!

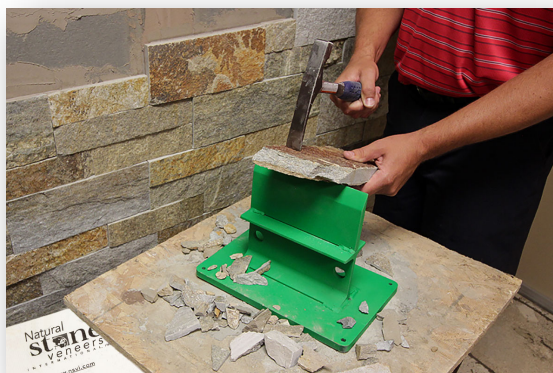

## Environmental Considerations

In HOT, or dry conditions, FDLNS recommends to dampen the scratch coat or masonry substrate where the stone is about to be applied. Otherwise, the stone will absorb moisture from the mortar too quickly, resulting in a weaker bond. It should appear damp without any pooling.

When air temperature falls below 50 degrees F (10 degrees C), heat mortar mixing water.

In temperatures less than 40 degrees F., mortar will not set properly. Keep the mortar and work area at, or above, 40 degrees.

Store mortar under cover in area where air temperature is maintained between 40 and 110 deg F (4 - 43 degrees C).

(For minimum requirements, see: ACI 530.1/ASCE 7/TMS 602)

- ◆ NIOSH N-95 Dust Mask
- ◆ Safety Glasses
- ◆ Ear Plugs
- ◆ Masonry Hammer
- ◆ Wet Saw w/Masonry/Diamond blade
  - Circular, 4" Grinder
  - Chop
- ◆ Levels
  - Torpedo
  - 2-ft Level
  - 4-ft Level
- ◆ Tape Measure
- ◆ Chalk Line
- ◆ Staple Gun or Pneumatic Fastener
- ◆ Brush or Wisk Broom
- ◆ Grout Bag
- ◆ Wheel Barrow
- ◆ 5-Gallon Buckets
- ◆ Tuck-pointer
- ◆ Trowels:
  - Notched
  - Mason's Trowel
  - Margin

# Getting Started *(continued...)*

## Preparation


### Common Substrates

#### Wood or Metal Studs

**Wood Studs:** Use corrosion resistant fasteners ensuring 1 inch of stud penetration. Space 16" horizontally on-center and every 6" - 8" vertically.

**Metal Studs:** Use appropriate corrosion resistant fasteners ensuring 1/2" of stud penetration. Space 16" horizontally on-center and every 6" - 8" vertically.

**Lath:** If using wire lath method, use appropriate fasteners and spacing in accordance with ASTM C1063.

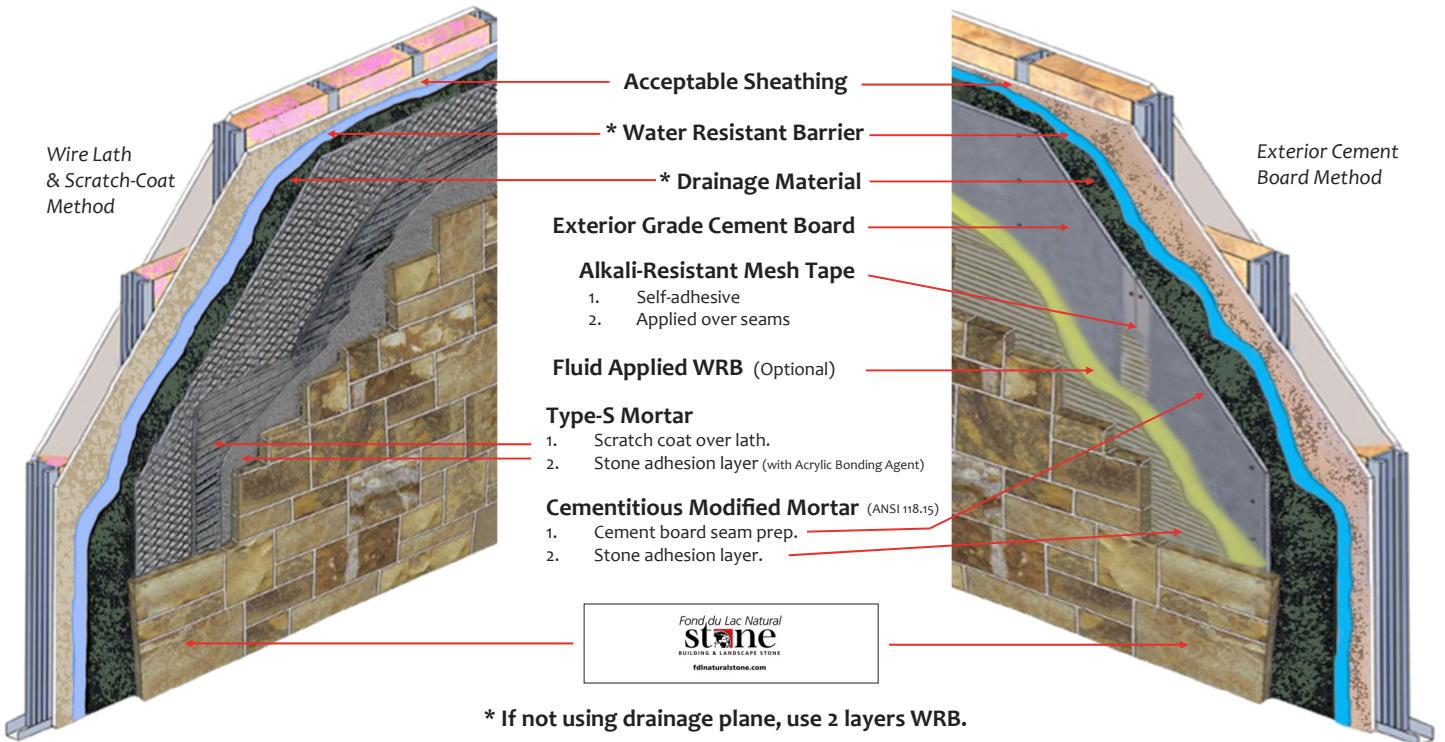


If CMU surface is untreated (no paint or other coatings), neither wire lath/scratch coat nor cement board is required.

Ensure surface is clean and free of debris.

When necessary, dampen CMU surface before applying stone (see "Applying...", Pg. 5).

#### Concrete Masonry Unit (CMU)

CMU Block

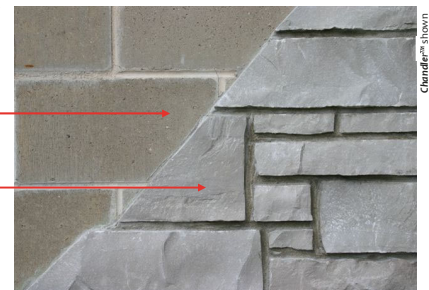

**Best Practice:** Use wire mesh & scratch coat as pictured (right).

If paint or other protective coating is present, FDLS recommends the use of galvanized diamond wire lath, 2.5 lbs per sq yd min gauge.


**Alternative:** If concrete wall appears smooth, and clean, there could still be release agents present. Surface should then be sand-blasted or etched with muriatic acid and allowed to thoroughly dry.

#### Poured Concrete

Poured Concrete

Wire Mesh

Scratch Coat

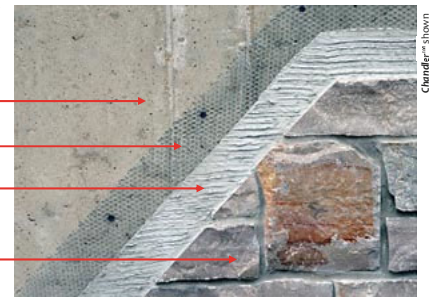



# Getting Started *(continued...)*

## Preparation

### Work Area

- Protect surfaces that could be damaged during the stone installation process, such as hardwood flooring, window trim, and other areas that have already been finished.
- Stage material close to the installation area. Layout stones so they can be easily viewed and reached. It is important to **obtain stones from multiple packages** (boxes and/or crates) and organize them by size, color, and texture. Opening all boxes and crates will facilitate random distribution.

### Moisture Control

- **Flashing:** Verify flashing is properly installed (roof, chimney, windows, door openings, etc.); should integrate with Water Resistant Barriers (WRB)
- **WRB:** At least one layer followed by rainscreen or drainage plane. Install from bottom up, overlapping min. 4 inches, horizontally and vertically.
- **Weep Screeds:** Should be applied per manufacturer's specifications. Depending on product, may need additional fabric layer to ensure product from getting filled with scratch coat. Must be corrosion resistant, and terminate behind WRB.
- **Drainage Plane:** A drainage wall system can be a design choice or a requirement of the local building code.
- **REFER TO LOCAL BUILDING CODES**

### Wire Lath/Mesh

- Use expanded, galvanized, self-furring diamond-mesh meeting requirements of ASTM C847-18 (min 2.5 lb/yd<sup>2</sup>).
- Install tightly, cups up (smooth when felt from bottom to top, rough when felt top to bottom.)
- Overlap sections of lath approximately 1 inch.
- Fasten lath with corrosion resistant fasteners every 16" horizontally on-center, and every 6" - 8" vertically.
- Wrap corners minimum 16" (inside and outside corners.)

**WOOD STUDS:** If anchoring to wood studs with screws, use washers, and ensure 1 inch of stud penetration. If anchoring with wide-crown staples, ensure staples will penetrate 1 inch deep.

**STEEL STUDS:** If anchoring to steel studs, ensure 1/2 inch of steel penetration beyond inside surface.

### Scratch-Coat

- Ensure surface is clean and free of any debris.
- Use Type-S mortar.
- It is important to **not** leave the scratch-coat surface smooth. Groove *scratch-coat* horizontally with a notched trowel or mason's "comb".
- *Scratch-coating* can be done in its entirety before adhering stone, but it is also acceptable to "*scratch-as-you-go*".

## Interiors (Over Drywall)

If drywall is used as the substrate, follow guidelines for *Wire Lath/Mesh* and *Scratch-Coat* as seen on this page. Then see, "*Applying FDLNS Stone Veneer*" on page 5.

**Cement Board—(For exteriors, use cement board rated for exteriors, and refer to moisture control section on this page.)**

- Instead of using moisture resistant barrier and wire mesh system, cement board products can be used for interiors. *(Exception: Interior water features require WRB.)*
- Apply cement board per manufacturer's specifications over studs (drywall is not necessary if using min. 1/2" thick cement board), but can be left in place).
- Fasten cement board using corrosion resistant screws every 16" horizontally on center, and minimum 6" vertically, ensuring minimum 1 inch of wood stud penetration, or 1/2" penetration if applied over metal studs.
- Tape cement board seams with fiberglass tape and seal seams with polymer modified mortar meeting ANSI 118.4, or ANSI 118.15.
- Use mortar meeting ANSI 118.4 or 118.15 specifications for adhering stone to cement board.
- Ensure surface is clean and free of debris.



## Mortar Setting Bed (Adhesion Layer)

**Type-S** (ASTM C270) or polymer modified mortar should be used for Natural Stone Veneer products unless tight-fitting for no visible mortar joints (i.e. *Ledgestone*, or *Dimensional Ledgestone Collections*.)

- Consistency of mortar mix is important. If too wet or too dry, mortar will not adhere to stone or substrate surface properly. It should stick to the trowel.
- FDLNS recommends adding **acrylic bonding agent** to Type-S mortar. This enhances the flexural, adhesion, compressive, and tensile strength qualities.

### Polymer Modified Mortar

**Thinset** (ANSI 118.4, or ANSI 118.15) when tight-fitting NSVI stone (also see Pg. 6).



# Installation

## Trimming & Cutting

### Diamond Blade Wet (or dry) Saw

Some stones may require custom fitting. A diamond masonry blade saw is the preferred means for precision cutting. Wear proper safety gear.



Along with dry saws, 4 inch grinders with diamond blades can be used to trim stones as needed.

### Masonry Hammer

Shaping and texturing edges for custom fitting stone is often done using a masonry hammer. This is very efficiently carried out when combined with the **King Cutter** →



Care should be taken to ensure safety and minimal waste.



<https://www.fdnaturalstone.com/wp-content/uploads/2023/03/King-Cutter-Promo-and-Safety-2021.pdf>

## Applying FDLNS Stone Veneer

- Begin installation at the bottom.
- It is helpful to install a temporary ledge to keep stone off of the floor (usually 1/2 inch above floor for interior walls), or 4 inches above grade for exteriors.<sup>1</sup> This will create a level starting point, and aid in speed of installation. Also, horizontal chalk-lines are beneficial every 12" - 16" for the same reason.
- Install some corner stones before flats.<sup>2</sup>
- Spread approximately 1/2 inch of mortar to entire back of stone (leave no air pockets).
- With firm pressure, press stone into place with a slight wiggle, allowing mortar to ooze around the outer edges of the stone. Take care to prevent mortar from getting on surface of stone. (See *Care, Cleaning, & Maint.* this page.)
- Hold in place for a few seconds or until stone feels relatively secure in its wet mortar bed.
- Small stone chips or wood wedges can aid in immobilizing stones. (Removed before filling joints.)
- Remove excess mortar from around stone using trowel or tuck pointer.
- Once placed—**Do Not Disturb.** If stone loosens, it must be removed. Mortar must be completely cleaned off of the stone **and** the area where the stone was located. Then, reinstall stone per steps above.

<sup>1</sup> See Pg. 7 "Grade Level Finishing".

<sup>2</sup> See Pg. 7 "Stone Patterns".

## Filling & Finishing Joints

### (Grouting & Tuck-pointing)

Use Type-S or N mortar.

### Two Methods for Filling Joints—

- **Fill-As-You-Go** \*  
Mortar is applied to top of previously placed stone ("bed-joint"), and to adjacent stones ("head joint") then a new stone is placed on top of (or next to) the mortar joint bed, and tuck-pointed into remaining joints around the stone, sealing it to substrate.
- **Grout Bag** (a.k.a. "cake-bag") \*  
Injecting mortar into joints after stone has been installed.

\* If used, remove stone chips and/or wood-wedges prior to filling in joints.



### Finishing—

When mortar joints become firm, or *thumbprint hard*, the finishing process can begin. Temperature and relative-humidity will affect the time it takes the mortar to get *thumbprint-hard*.

*Mortar joints are typically raked back and brushed smooth dependent on the joint style specified:*


**Overgrout**— Mortar joints are filled in, flush to the surface of adjacent stone(s), then smoothed with a soft bristle brush.

**Standard**— Mortar joints are raked back to reveal the edge of the stones, then swept smooth with the brush. Joints should **not** be raked too deep as this could impact the integrity of the installation.

**Key:** Do Not Give Reason for Water To Get Behind Stone.



Sydney (Overgrout) shown

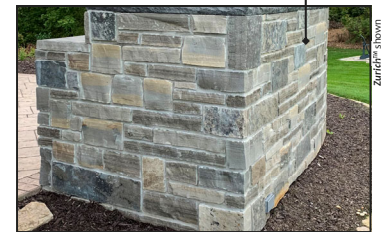

Zurich shown

## Care, Cleaning & Maintenance

If mortar gets on the face of the stone, let it dry slightly, brush off, and then sponge off any residue left behind. The best cleaning method for natural stone is a diluted, mild, detergent, 2—3 days after stone is set. Try an inconspicuous test area before attempting to clean an entire stone surface.

**Do Not Use Metal Brushes or Acids!**



# Application Tips

## Arches

### With or Without Corners

- For a full-veneer look, use corners as shown in the photo (right).
- For a more uniform appearance, a *soldiers-course* can be installed using only flats as shown (below).
- Bracing is generally not required, but mortar consistency is important.



## Columns


### CMU or Wood Substrates are Typical

#### CMU — (Preferred)

- Begin with corners, staggering the lengths.
- Follow instructions for CMU on Pg. 3.

#### Wood Substrate —

- Column should be of sturdy, sound construction, and internally braced to prevent twisting and to minimize movement.
- Columns should be designed so that stone does not bear the load of other structural or aesthetic elements.
- Apply weather resistant barrier as needed (see Pg. 4)
- Wire lath must be wrapped 16 inches min. around the corners.
- Lath should wrap around and meet at or near center of one of the column sides, overlapping by at least 1 inch.
- Follow remaining procedures on Pages 4 and 5.

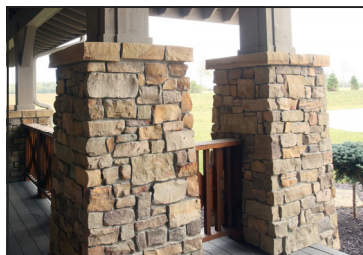

**If capping top of exterior column(s), caps should extend 1–2 inches beyond the surface of the installed stone to help facilitate water run-off.**

## Corners (Outside, 90 Degree Only)

- Start at the bottom.
- Stagger return lengths.
- Maintain level returns (excluding irregular stone, i.e. fieldstone & mosaic).

### Virginia & Silver LedgeStone

- For every corner, integrate 2–3 flats above it to avoid a vertical jagged line.

All downloadable **Corner Installation** guides: <https://www.fdlnaturalstone.com/installation-instructions/>

## Drystacking (Tight-Fit joints)

- LedgeStone is typically installed with *tight-fit* joints. FDLNS recommends **Polymer Modified Mortar** meeting ANSI 118.4 or 118.15 for all tight-fit applications. (See also Pg. 4, “Mortar”)
- Fully cured and dry mortar joints are usually white or gray, however, a color additive can be mixed in to compliment the natural stone hues. Follow instructions on manufacturer’s label to ensure proper and consistent proportions.



## Fireplaces

### Make Over: Installing Stone Over Existing Brick



Brick surface texture and coatings (if present) must be evaluated to determine if wire mesh and scratch coat is needed. If too smooth or painted, wire mesh and scratch coat is required. If surface is porous, unpainted, and mortar joints are in good shape, clean surface, ensure it is debris free, then butter back of stone, and firmly press stone into place.



Wire Mesh applied over drywall.



Scratch-coat of mortar applied.



Keeping stones level.



Finished project.

### Hearths



Building a new hearth out of plywood, followed by wire mesh, anchoring to floor, scratchcoat, then stone.

# Application Tips *(continued)*

## Flashings

Consult your local building codes, and review FDLNS drawings at the following link: <https://www.fdnaturalstone.com/architects-specifications/>

## Floors, Walks, & Patios

Natural Thin Stone veneers can be installed over untreated concrete walks and other substrates. NSVI recommends travertine stone tiles for horizontal surfaces, but high density sandstone or limestone flats can also be used. **Prevent tripping hazards** by selectively choosing flats with consistent depth and surface texture before installation, and consider full mortar joints (overgrout). **Surface options:**


- Interiors— Over Concrete  
Over Wood Subfloor
- Exteriors— Over Concrete  
Over Decking (Additional consideration to deck design may be required.)

## Grade Level Finishing

- Over Concrete—Stone is to remain 2" above (i.e. garage front).
- Ground Level—Stone is to remain 4" above.


## Hearth, Trim, & Keystones

NSVI accessory stones have the dimensions shown below, or can be custom-cut onsite using the same stone type as the project:

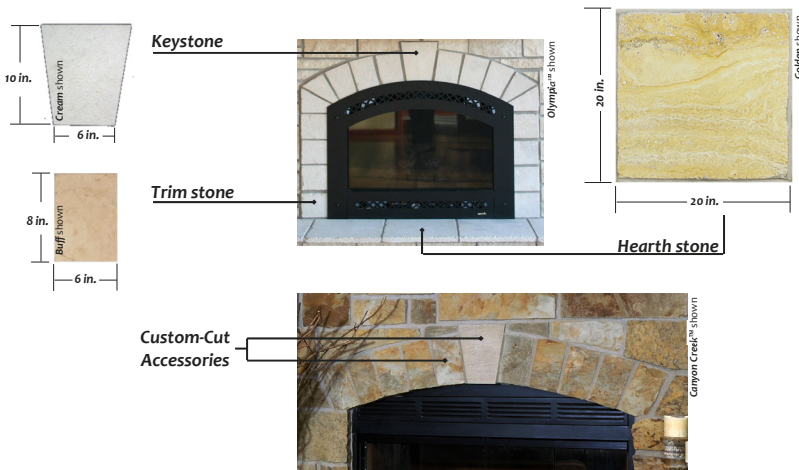

## Sills & Windows

Sills should be installed at a slight downward angle for water run-off.

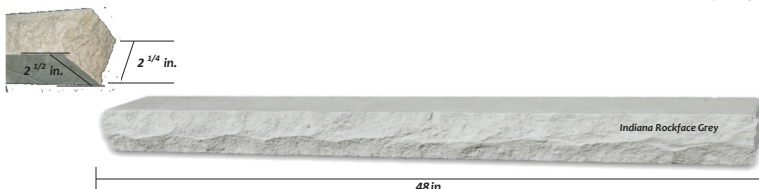

## Stone Patterns... With or Without Corners:

FDLNS recommends the following patterns & layouts. Please view FDLNS website photo slideshows in each Collection for representative installations.

Note that it is not necessary to strictly follow these recommended configurations:


### Dimensional— 2:1 pattern, specified heights

FDLNS Collection:  
` Dimensional



### Dimensional LedgeStone— Tight-fit, 1:1 & 2:1 pattern

FDLNS Collections:  
` Dimensional - LedgeStone




` LedgeStone Panels




### Random Ashlar— Combination 1:1 & 2:1 pattern

FDLNS Collections:  
` Biltmore  
` Country  
` Falls  
` Traditional  
` Tuscan




### LedgeStone— Typically tight-fit, 1:1 pattern

FDLNS Collection:  
` LedgeStone



### Mosaic— Irregular, randomly sized material

FDLNS Collections:  
` Fieldstone  
` Mosaic  
` Old World





Fond du Lac Natural  
**stone**  
 BUILDING & LANDSCAPE STONE

fdlnaturalstone.com

**Codes & Standards**

**ASTM**


- C 847 Metal Lath
- C 270 Mortar for Unit Masonry
- C1063 Installation of Lathing & Furring

**ACI 530/530.1-13 | ASCE/SEI 7-22 | TMS 402/602-22**

Building Code Requirements  
 for Masonry Structures

**ANSI 118.4 & 118.15**

Polymer Modified Mortars

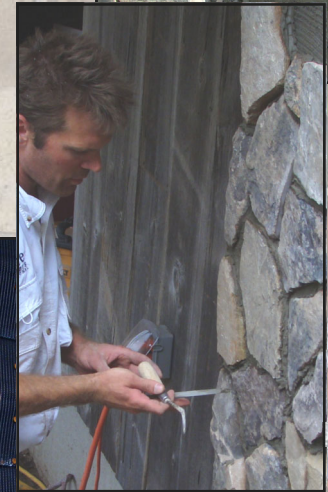

**CONTACT INFORMATION**

**Fond du Lac Natural Stone**

P.O. Box 347

Fond du Lac, WI 54936-0347

**Toll Free:** 877-923-2800

**Dealer Info & Tech Support:** 920-251-2434

**Email:** info@fdlnaturalstone.com

**Warranty**

**Fond du Lac Natural Stone, Natural Stone Veneers International, Inc. & Fond du Lac Stone —Limited Warranty**

Subject to these terms and conditions, Fond du Lac Natural Stone ("FDLNS"), Natural Stone Veneers International, Inc ("NSVI") and Fond du Lac Stone ("FDL Stone") warrants its products for a period of fifty (50) years from the date of original purchase from FDLNS/NSVI/FDL Stone against manufacturing defects when used on a structure which conforms to all building codes and regulations and when installed in accordance with NSVI's instructions, specifications and guidelines. In the event of a defect, FDLNS/NSVI/FDL Stone will credit the cost of the products purchased or, at FDLNS/NSVI/FDL Stone's option, repair or provide new products to replace any products determined to be defective. This warranty is limited to the original purchaser and may not be transferred to any subsequent owner. This limited warranty does not cover damage from: a) settlement of the building or improvement or other structural movements; b) contact with chemicals or paint; c) deterioration or discoloration due to airborne contaminants; or d) staining or oxidation. This limited warranty covers only manufacturing defects in FDLNS/NSVI/FDL Stone products. FDLNS/NSVI/FDL Stone is not responsible for labor costs in removal and replacement of defective products.

THIS LIMITED WARRANTY DOES NOT COVER, AND SHALL AUTOMATICALLY BECOME NULL AND VOID, FOR THE FOLLOWING REASONS: (i) ABUSE; (ii) MISUSE; (iii) ACCIDENT; (iv) IMPROPER INSTALLATION, APPLICATION OR MAINTENANCE; (v) FAILURE TO NOTIFY NSVI OR FDL STONE OF A CLAIMED COVERED DEFECT IMMEDIATELY WHEN NOTICED; OR (vi) FAILURE TO USE THE PRODUCTS IN ACCORDANCE WITH NSVI'S INSTRUCTIONS, SPECIFICATIONS AND GUIDELINES. THIS WARRANTY IS EXCLUSIVE, AND EXCEPT AS EXPRESSLY SET FORTH HEREIN, NEITHER NSVI NOR FDL STONE MAKES ANY OTHER WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, AND DISCLAIMS ALL WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. IN ANY EVENT, THE SOLE REMEDY OF THE ORIGINAL PURCHASER SHALL BE A CREDIT FOR THE COST OF THE PRODUCTS PURCHASED FROM NSVI OR FDL STONE, AT FDLNS/NSVI/FDL STONE'S OPTION, REPAIR OR REPLACEMENT OF SUCH PRODUCTS. FDLNS/NSVI/FDL STONE SHALL NOT UNDER ANY CIRCUMSTANCES, WHETHER FOR A FAILURE OF ITS LIMITED WARRANTY NOR OTHERWISE, BE LIABLE TO BUYER OR OTHERWISE FOR SPECIAL, INCIDENTAL, DIRECT, PUNITIVE, OR CONSEQUENTIAL DAMAGES, OR FOR DAMAGES IN EXCESS OF ANY AMOUNTS PAID TO FDLNS/NSVI/FDL STONE HEREUNDER. NO WAIVER, ALTERATION, ADDITION OR MODIFICATION OF THE FOREGOING CONDITIONS SHALL BE VALID UNLESS MADE IN WRITING AND SIGNED BY AN OFFICER OF FDLNS/NSVI/FDL STONE.

